


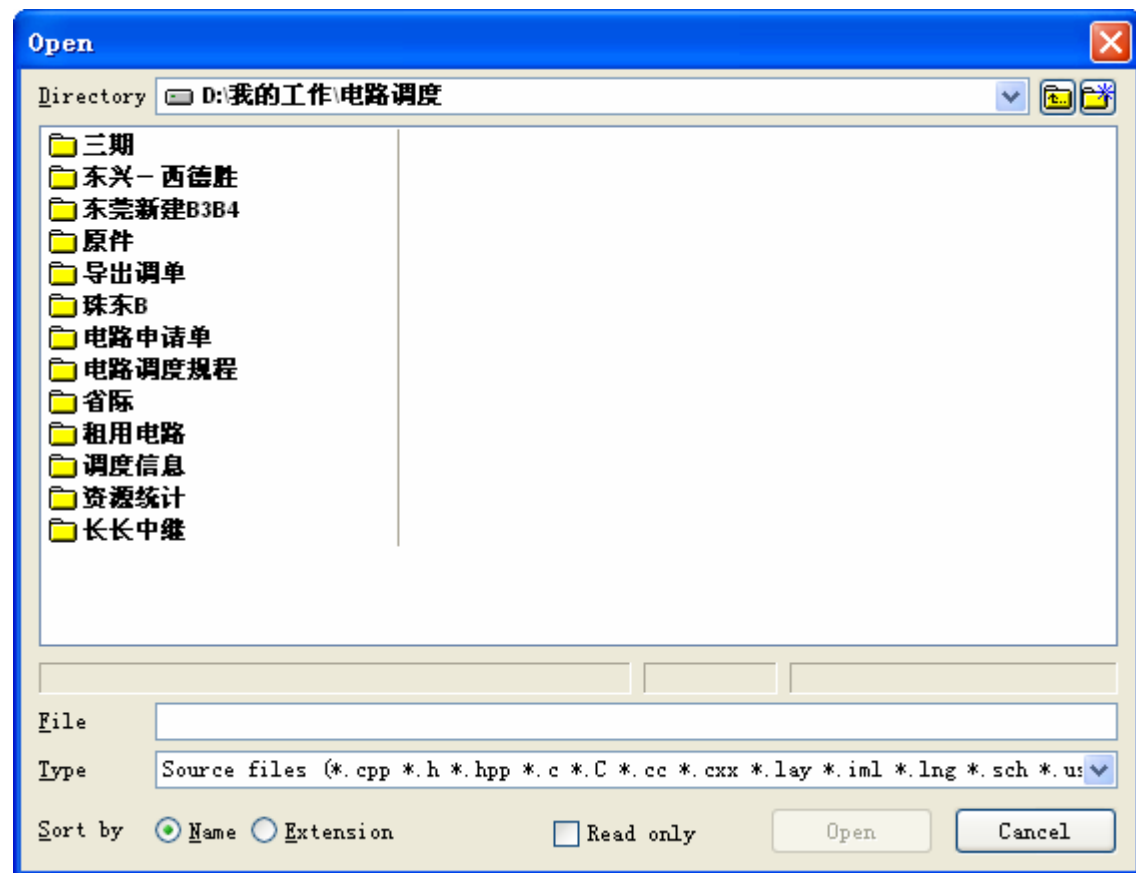

```
view1.m_Array1.AddColumn("A", "列1", 40);  
view1.m_Array1.AddColumn("B", "列2", 40);  
view1.m_Array1.AddColumn("C", "列3", 40);  
m_NETab.Add(view1, "端口信息");  
m_NETab.Add(view2, "数据配置");
```