

---

Subject: Font drawing in linux

Posted by [Zbych](#) on Thu, 30 Jun 2011 11:10:04 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Hi,

I am writing an application that shows information on small (44x16 pixel) LED display. The problem is that ttf fonts in NOGTK version of UPP look worse than in GTK. I thought that font rendering is the same in GTK and NOGTK version. Any ideas how to correct font drawing?

Test code:

```
#include <CtrlLib/CtrlLib.h>
#include <Draw/Draw.h>

using namespace Upp;

GUI_APP_MAIN
{
    Size sz(55,24);
    Font fnt(Font::FindFaceNameIndex("Impact"), 14);
    fnt.NonAntiAliased();
    ImageDraw id(sz);
    id.DrawRect(0, 0, sz.cx, sz.cy, Black());
    id.DrawText(0, -4, "PO LINE1", fnt, White());
    id.DrawText(0, 8, "PO LINE2", fnt, White());
    PNGEncoder png;
    png.SaveFile("FontTest.png", Image(id));
}
```

---

## File Attachments

1) [zrzut\\_ekranu.png](#), downloaded 1327 times

---

NOGTK VERSION

G

---

Subject: Re: Font drawing in linux  
Posted by [dolik.rce](#) on Thu, 30 Jun 2011 13:06:11 GMT  
[View Forum Message](#) <> [Reply to Message](#)

Hi Zbych,

Wild guess before someone competent answers: Have you tried using Painter? It generally creates much nicer images than Draw. Also, you might try rendering a bigger image and then scaling it down. Of course, this doesn't answer the question why there is a difference between NOGTK and regular...

Anyway, it sounds like an interesting project

Best regards,  
Honza

---


Subject: Re: Font drawing in linux  
Posted by [Zbych](#) on Thu, 30 Jun 2011 14:04:52 GMT  
[View Forum Message](#) <> [Reply to Message](#)

With painter it looks great. How can I turn off antialiasing?

Ok. I've found how to turnoff AA. MODE\_NOAA must be added to ImagePainter initialization. But IMHO it's a pity that ImagePainter doesn't respect font properties (NonAntiAliased flag) like ImageDraw does.

## File Attachments

1) [zrzut\\_ekranu.png](#), downloaded 1187 times

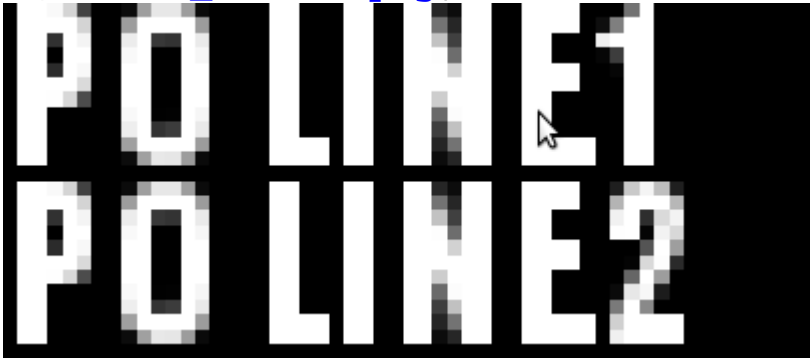

---

Subject: Re: Font drawing in linux  
Posted by [mr\\_ped](#) on Thu, 30 Jun 2011 18:17:35 GMT  
[View Forum Message](#) <> [Reply to Message](#)

I think ImageDraw does use OS API to draw fonts whenever possible, which looks to be in both GTK and NOGTK case of your test.

Painter is complete SW renderer from U++, so it is not affected by OS libraries, but on the other hand the level of features supported like using all the info out of font is limited.

With Painter you can anytime jump into the source, and suggest patches to improve it or just bend it for your custom needs.

With classic ImageDraw you can just take it or leave it, the code is inside OS, not U++. (maybe you can patch slightly the way how OS font rendering is called)

---

Subject: Re: Font drawing in linux  
Posted by [mirek](#) on Sat, 02 Jul 2011 09:49:07 GMT  
[View Forum Message](#) <> [Reply to Message](#)

I have found the problem with NOGTK flag (gtk\_hinting should be initialized to -1), now fixed.

Mirek

---

Subject: Re: Font drawing in linux  
Posted by [Zbych](#) on Sat, 02 Jul 2011 15:03:59 GMT  
[View Forum Message](#) <> [Reply to Message](#)

Thank you.