
Subject: How to Print a file inside LineEdit
Posted by [forlano](#) on Sun, 14 May 2006 17:34:08 GMT
[View Forum Message](#) <> [Reply to Message](#)

Hello,

I've a file in a LineEdit widget and I desire to send it to the Printer. I've found with Assist the Print() function but it seems to work with RichText while I've a simple text file. So I wonder if it works or there is a U++ Print method that can do the job. (At the moment I've not a printer so I cannot test if the Print() method RichTest based works in my case).

BTW, this question is more general because in principle I could want to print a text file bypassing any widget and sending it directly to the printer.

Thank you,

Luigi

PS: The class RichEdit has the Print() method, why LineEdit has not the same?

Subject: Re: How to Print a file inside LineEdit
Posted by [mirek](#) on Sun, 14 May 2006 19:44:55 GMT
[View Forum Message](#) <> [Reply to Message](#)

forlano wrote on Sun, 14 May 2006 13:34Hello,

I've a file in a LineEdit widget and I desire to send it to the Printer. I've found with Assist the Print() function but it seems to work with RichText while I've a simple text file. So I wonder if it works or there is a U++ Print method that can do the job. (At the moment I've not a printer so I cannot test if the Print() method RichTest based works in my case).

BTW, this question is more general because in principle I could want to print a text file bypassing any widget and sending it directly to the printer.

Thank you,

Luigi

PS: The class RichEdit has the Print() method, why LineEdit has not the same?

There is no direct support for printing of LineEdit.

The simplest way to print is to use Report. Simply, instead to sending your stuff to "Draw", you use Report (which implements Draw interface), just add some calls to perform pagination. Alternatively, use Qtf, which you can send to Report as well.

Mirek

Subject: Re: How to Print a file inside LineEdit
Posted by [forlano](#) on Mon, 15 May 2006 19:09:08 GMT
[View Forum Message](#) <> [Reply to Message](#)

luzr wrote on Sun, 14 May 2006 21:44: The simplest way to print is to use Report. Simply, instead to sending your stuff to "Draw", you use Report (which implements Draw interface), just add some calls to perform pagination. Alternatively, use Qtf, which you can send to Report as well.

Mirek

I tried Report. Perhaps I do some mistake but doesn't seems so immediate. Let's neglect for the moment the pagination and let assume I've only one page to print. I tried the following code:

```
void VegaTab4::PrintCB()
{ Report r;
  // r.Header("[A2> Page $$P");
  r << "Round 1";
  r << "=====";
  r << " 1 = 4 Karpov, Igor      - 2 Karpov, Vadim      = 1 - 0";
  r << "-----";
  Print( r, 1, "Preview");
  // Perform(r); //same format error
}
```

When I run it appear the print panel. Then I click print and I observe the result attached below (I've printed with a pdf driver and then get a screenshot).

So it seems Report try to interpret the strings in qtf terms. This means that my text file is processed as a qtf file while it has no format command and I want to send to the printer each character the file contains.

Before to obtain this error I believed I could get the entire text file and pass via << to r and then print it. But now seems I cannot avoid to save the file in qtf format. Am I right?

Anyway I think could be very useful to have a very direct way to communicate with a printer without any interference and control about font etc. With linux I could use a calling to system and print via 'lp', but with windows I would like to have the possibility to choose at least the printer.

Luigi

File Attachments

1) [swiss5.jpg](#), downloaded 2247 times

Round 1

```
=====
1 = 4 Karpov, Igor      - 2 Karpov, Vadim      = 1 - 0
```

ERROR: Not in table: -----

Subject: Re: How to Print a file inside LineEdit
Posted by [mirek](#) on Mon, 15 May 2006 20:00:21 GMT
[View Forum Message](#) <> [Reply to Message](#)

forlano wrote on Mon, 15 May 2006 15:09luzr wrote on Sun, 14 May 2006 21:44The simplest way to print is to use Report. Simply, instead to sending your stuff to "Draw", you use Report (which implements Draw interface), just add some calls to perform pagination. Alternatively, use Qtf, which you can send to Report as well.

Mirek

I tried Report. Perhaps I do some mistake but doesn't seems so immediate. Let's neglect for the moment the pagination and let assume I've only one page to print. I tried the following code:

```
void VegaTab4::PrintCB()
{ Report r;
// r.Header("[A2> Page $$P");
r << "Round 1";
  r << "=====";
  r << " 1 = 4 Karpov, Igor      - 2 Karpov, Vadim      = 1 - 0";
  r << "-----";
  Print( r, 1, "Preview");
// Perform(r); //same format error
}
```

When I run it appear the print panel. Then I click print and I observe the result attached below (I've printed with a pdf driver and then get a screenshot).

So it seems Report try to interpret the strings in qtf terms. This means that my text file is processed as a qtf file while it has no format command and I want to send to the printer each character the file contains.

Before to obtain this error I believed I could get the entire text file and pass via << to r and then print it. But now seems I cannot avoid to save the file in qtf format. Am I right?

Anyway I think could be very useful to have a very direct way to communicate with a printer without any interference and control about font etc. With linux I could use a calling to system and print via 'lp', but with windows I would like to have the possibility to choose at least the printer.

Luigi

You can "avoid" qtf by calling DeQtf for texts you pass... That will add escape characters that will "quote" original text in Qtf.

```
void VegaTab4::PrintCB()
{ Report r;
// r.Header("[A2> Page $$P");
r << "Round 1";
r <<
DeQtf("=====");
r << DeQtf(" 1 = 4 Karpov, Igor - 2 Karpov, Vadim = 1 - 0");
r << DeQtf("-----");
Print( r, 1, "Preview");
// Perform(r); //same format error
}
```

Mirek

Subject: Re: How to Print a file inside LineEdit
Posted by [forlano](#) on Mon, 15 May 2006 21:13:15 GMT
[View Forum Message](#) <> [Reply to Message](#)

luzr wrote on Mon, 15 May 2006 22:00
You can "avoid" qtf by calling DeQtf for texts you pass... That will add escape characters that will "quote" original text in Qtf.

```
void VegaTab4::PrintCB()
{ Report r;
// r.Header("[A2> Page $$P");
r << "Round 1";
r <<
DeQtf("=====");
r << DeQtf(" 1 = 4 Karpov, Igor - 2 Karpov, Vadim = 1 - 0");
r << DeQtf("-----");
Print( r, 1, "Preview");
// Perform(r); //same format error
}
```

Mirek

I tried and it works. Unfortunately there is again one more problem : by default it is set the proportional font. Instead i would like to print with courier font to preserve the vertical alignment present in the file. Using UWord I got the format command to print with courier, say 11. So I've tried to embed one text line in a formatted command line with courier font like this:

```
void VegaTab4::PrintCB()
{ Report r;
  r << "[ $$0,0#00000000000000000000000000000000:Default]"
    "[{ }%EN-US"
    "[s0;C+92 Round 1 ]"; //it's OK

  r << "[s0;C+92 " << DeQtf("Round 1") << " ]"; // doesn't work
  r << "[s0;C+92 " <<
DeQtf("=====") << " ]" ;
  Print( r, 1, "Preview");
}
```

This produce problem (see attached picture) because do not recognise the final "]" and this seems strange to me.

I've even tried

```
r.SetFont(Courier(12));
```

with no success. So, is there a way to set by default the Courier font?

Luigi

File Attachments

1) [swiss6.jpg](#), downloaded 3328 times

Round 1

Round 1

ERROR: Unmatched ']':

=====
ERROR: Unmatched ']':

Subject: Re: How to Print a file inside LineEdit
Posted by [mirek](#) on Mon, 15 May 2006 23:35:42 GMT
[View Forum Message](#) <> [Reply to Message](#)

forlano wrote on Mon, 15 May 2006 17:13luzr wrote on Mon, 15 May 2006 22:00
You can "avoid" qtf by calling DeQtf for texts you pass... That will add escape characters that will

Luigi

There is one tricky thing about Report::operator<< - it takes each call as separate qtf text. So

```
r << "[s0;C+92 " << DeQtf("Round 1") << " ]";
```

makes for 3 separate texts.

To fix it, simply add texts together:

```
r << "[s0;C+92 " + DeQtf("Round 1") + " ]";
```

(Note that adding here is possible because DeQtf returns String).

Mirek

Subject: Re: How to Print a file inside LineEdit
Posted by [forlano](#) on Tue, 16 May 2006 16:10:06 GMT
[View Forum Message](#) <> [Reply to Message](#)

luzr wrote on Tue, 16 May 2006 01:35 To fix it, simply add texts together:

```
r << "[s0;C+92 " + DeQtf("Round 1") + " ]";
```

(Note that adding here is possible because DeQtf returns String).

Mirek

Thanks to your help now everything works as I wanted.

I think this way to print (knowing it) is superior to that to send directly the file to the printer. In fact the font size can be selected and the text can be rescaled and reoriented before to send it to the printer. This is of course more flexible. For this reason I've added a size font selector that rescale the image file when necessary.

Now I need few information to permit me to organize a good pagination. Report has too much option and I'm a bit lost.

I run the following commands regarding the dimension and I've obtained the following results:

- 1) `sz = r.GetSize(); // 3968 x 6074 => aspect ratio = 0.652`
- 2) `sz = r.GetPageMMs(); // 320 x 240 => aspect ratio = 0.75`
- 3) `sz = r.GetPagePixels(); // 1024 x 768 => aspect ratio = 0.75`

I guess GetPageMMs() returns the dimensions in millimeters.
Now 2) and 3) returns dimensions that produce the same aspect ratio. So I wonder what GetSize() returns to give a different aspect ratio.

In the row

```
r << "[s0;C+92 " + DeQtF("=====") + " ]" ;
```

which are the unit of the font height indicated by '92'?

Last question. If I send my code example to the printer (actually a pdfdriver) I obtain the following attached picture.

In it you can see an offset both for vertical and horizontal in the top left page. But If I preview it with Perform(r) the offset is absent on the screen! So, is it present some offset or the pdfprinter do some bad joke?

Thank you.

Luigi

PS: I guess these information, knowing the the number of lines of the file (maybe even the longest row of the file), should be enough to produce an acceptable pagination. If I need some other parameter please let me know it.

File Attachments

1) [swiss5.jpg](#), downloaded 3450 times



Subject: Re: How to Print a file inside LineEdit
Posted by [mirek](#) on Tue, 16 May 2006 20:11:45 GMT
[View Forum Message](#) <> [Reply to Message](#)

Well, there is one important thing to know about U++ "distances".

Basically said, if the output goes to the screen, they are in pixels.

However, if there is "physical representation" (paper from the printer, or e.g. PDF which is in fact paper from the printer again), U++ uses "dots", where dot is defined as "pixel in 600dpi resolution".

And that is what GetSize returns. Actually, those numbers are chosen for A4 page and are indeed quite conservative (in fact, most printers are capable printing in much wider area, but it is different for each printer). When Report prints the page out, it takes "printer" page dimension and centres report size within it.

Mirek

Subject: Re: How to Print a file inside LineEdit
Posted by [forlano](#) on Wed, 17 May 2006 17:16:31 GMT
[View Forum Message](#) <> [Reply to Message](#)

The following code snippet read a text file and print it via the Report control. The font used is Courier. The size font, hf, come from the widget "FontHeight edt". Each line of the file is sent to report with

```
r << "[s0;C+" + sizefont + DeQtf(line) + " ]";
```

Luigi

```
void VegaTab4::PrintCB()
{
    Report r;
    FileIn in(filename);
    String sizefont;
    r.SetPageSize(4500, 6300); // reduce the left margin

    double hf = StrDbfValue(AsString(~edt));
    sizefont = AsString( (int)(59 + (hf - 7.) * 10.) );


    while(!in.IsEof()) {
        String line = in.GetLine();
        r << "[s0;C+" + sizefont + DeQtf(line) + " ]";
    }
    in.Close();

    // Print( r, 1, "Preview");
    Perform(r);
}
```

}

File Attachments

1) [swiss5.jpg](#), downloaded 2259 times

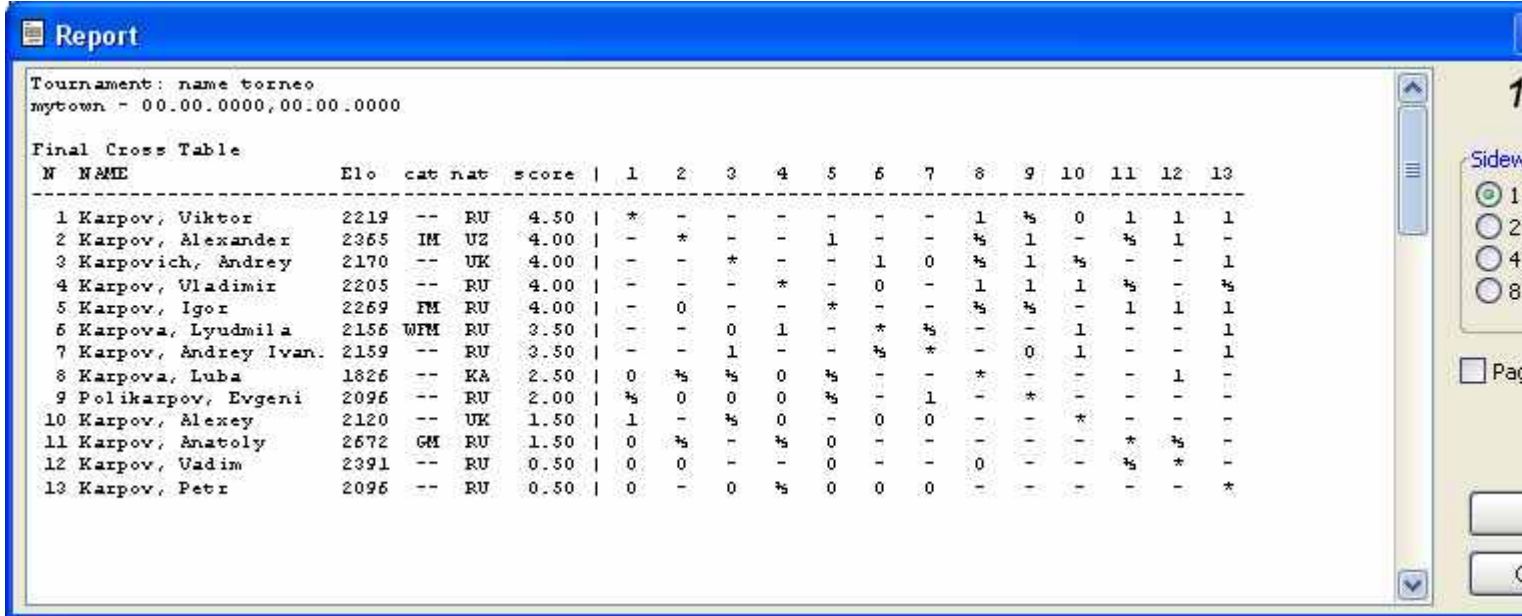

Report

Tournament: name torneo
mytown - 00.00.0000,00.00.0000

Final Cross Table

N	NAME	Elo	cat	nat	score	1	2	3	4	5	6	7	8	9	10	11	12	13
1	Karpov, Viktor	2219	--	RU	4.50	*	-	-	-	-	-	-	1	½	0	1	1	1
2	Karpov, Alexander	2365	IM	UZ	4.00	-	*	-	-	1	-	-	½	1	-	½	1	-
3	Karpovich, Andrey	2170	--	UK	4.00	-	-	*	-	-	1	0	½	1	½	-	-	1
4	Karpov, Vladimir	2205	--	RU	4.00	-	-	-	*	-	0	-	1	1	1	½	-	½
5	Karpov, Igor	2269	FM	RU	4.00	-	0	-	-	*	-	-	½	½	-	1	1	1
6	Karpova, Lyudmila	2156	WFM	RU	3.50	-	-	0	1	-	*	½	-	-	1	-	-	1
7	Karpov, Andrey Ivan.	2159	--	RU	3.50	-	-	1	-	-	½	*	-	0	1	-	-	1
8	Karpova, Luba	1826	--	KA	2.50	0	½	½	0	½	-	-	*	-	-	-	1	-
9	Polikarpov, Evgeni	2096	--	RU	2.00	½	0	0	0	½	-	1	-	*	-	-	-	-
10	Karpov, Alexey	2120	--	UK	1.50	1	-	½	0	-	0	0	-	-	*	-	-	-
11	Karpov, Anatoly	2672	GM	RU	1.50	0	½	-	½	0	-	-	-	-	-	*	½	-
12	Karpov, Vadim	2391	--	RU	0.50	0	0	-	-	0	-	-	0	-	-	½	*	-
13	Karpov, Petr	2096	--	RU	0.50	0	-	0	½	0	0	0	-	-	-	-	-	*

Subject: Re: How to Print a file inside LineEdit

Posted by [mirek](#) on Wed, 17 May 2006 18:30:26 GMT

[View Forum Message](#) <> [Reply to Message](#)

There should be a single space after sizeof to delimit/terminate qtf command sequence... And ending "]" is not necessary here:

```
r << "[C+" + sizeof + ' ' + DeQtf(line);
```

Mirek

Subject: Re: How to Print a file inside LineEdit

Posted by [forlano](#) on Wed, 17 May 2006 18:45:40 GMT

[View Forum Message](#) <> [Reply to Message](#)

luzr wrote on Wed, 17 May 2006 20:30 There should be a single space after sizeof to delimit/terminate qtf command sequence... And ending "]" is not necessary here:

```
r << "[C+" + sizefont + ' ' + DeQtF(line);
```

Mirek

oops... , you are right and in my code there is. In fact without it I couldn't print. In the original version the space was in size font

```
sizefont = AsString( (int)(59 + (hf - 7.) * 10.) ) + " ";
```

But I didn't like there. So I removed it from there to move in r <<... but I forgot to add ... About "]" good to know.

Luigi
